

SMARTRAC



SMARTRAC

Self-propelled
mixer feeder

Trioliet: Invents for you.

 **TRIOLIET**
FEEDING TECHNOLOGY



New generation self-propelled mixer feeder wagons

The aspect "time" is becoming increasingly important in modern agriculture. Beside this it is important to feed as efficient as possible with minimal nutritional losses. Keeping this in mind Trioliet introduces the "Smartrac Line". The Smartrac combines both the speed and comfort of a self-propelled machine along with the efficiency and fibre preservation of a cutting system. Thanks to the speed and ease of operating of the Smartrac, feeding more often a day comes within reach lifting the DM intake and feed efficiency to a higher level. The Smartrac also allows to create multiple rations for various production groups. Due to the different requirements, such as farm yard circumstances, dimensions of cow houses, silo heights, etc. Trioliet now offers different Smartrac solutions. Our Smartrac "Line" contains the Smartrac G, the Smartrac T and the Smartrac S.



The engine, drive line and auger drive of each Smartrac match perfectly for an optimal feeding machine. Not wasting energy (and money) by a too big engine or even a too small engine with the need for supplementary reduction gearboxes. As only self propelled mixer on the market the Smartrac proves to be a multifunctional machine as well by offering a feed-push system. One machine for loading, mixing, discharging and pushing feed.

SMARTRAC G



Loading

The telescopic cutting-loading system cuts out the feed and transports it into the mixing chamber. After loading, a smooth and clean silage face is left behind. The Smartrac is able to load any feed, including grains and even square and round bales, in a fast and accurate way.



Mixing

The Smartrac is equipped with the proven Twin Stream vertical mixing auger with Trioform auger knives. The horizontal position of the Trioform knives ensures an optimum cutting performance with less resistance. The knives are self-sharpening and the special shape results in a higher strength and improved life time.

Discharge

The front cross conveyor belt discharges the feed evenly to the left or to the right side. The 2,44m long conveyor can optionally be equipped with a side shift. A curved front cross conveyor or flat front cross conveyor chain are also possible.

Drive

The Smartrac is equipped with a mechanical gearbox in combination with an electro-hydraulic reverse and a Hi-Lo shift per gear. There are 24 gears forward and 12 gears backward. The maximum speed is 25 km/h with hydraulic brakes on every wheel.

Twin Stream mixing auger

The mechanically driven vertical auger can electro-hydraulically be activated by the push of a button. Two auger speeds are possible for a low power requirement and efficient mixing along with a fast clean-out speed during discharging.

SMARTRAC G



Features

- Low fuel consumption because of the cutting system and mechanical drive
- Less feed losses because of preservation of the structure from the silage and a smooth silo face
- Capacity 10 m³ and 12 m³.
- Suitable for low barns because of the maximum height of only 2,70 m.
- High loading capacity by telescopic loading system
- Cutting height up to 4,50 m.
- Compact and manoeuvrable
- Optimum view during loading, because of swivel chair and operation controls



SMARTRAC T



- Capacity 10m³ and 12m³
- Wide cutting system
- High loading capacity due to a wide and big cutting frame
- Manoeuvrable machine
- Cutting height from 3,15 to 3,60 m

SMARTRAC S



- Compact and manoeuvrable machine
- Quick and easy to handle compared to a tractor + trailed mixer feeder combination
- Easy reversing, ideal for U-stables

Technical information Smartrac G:	1000	1200
Capacity m ³	10	12
Discharge	Cross conveyor belt in front	
Length m	7,60	7.60
Width m	2,55	2.55
Height m	2,70	3.00
Track width m (front)	2,42	2,42
Track width m (rear)	2,45	2,45
Wheelbase m	4,11	4,11
Cutting height max. m	4,50	4,50
Cutting width m	1,45	1,45
Cutting depth max. m	0,55	0,55
Discharge height m	0,59	0,59
Engine (diesel) kW	56 (76)	56 (76)
Tires, front	385/65 R 22,5 (2x)	385/65 R 22,5 (2x)
Tires, rear	295/60 R 22,5 (2x)	295/60 R 22,5 (2x)
Number of auger knife positions	7	10
Number of knives mounted per auger	4	7
Capacity of fuel tank (L).	140	140
Max. speed (km/h)	25	25


Trioliet reserves the right to make changes in design and specifications, or to add new features without obligation on implements before or after such changes are made.

Standard Features:

Mechanical drive with powershift and electro-hydraulic reverse, U-shaped cutting frame for high capacity, Telescopic cutting frame with discharge height of 4,5 m., Twin stream auger with Trioform auger knives, Mechanically driven Twin Stream auger with 2 auger speeds, Conveyor belt at front for discharge to the left and to the right, Swivel chair and operation controls for optimum view during loading, 4-cilinder JCB engine with 56 kW (76 HP), Cabine with heating, pre-installed radio, windows wiper at front and at rear, Lighting set, Work lights (9x), Electric adjustable and heated mirrors.

Options:

Triotronic electronic weighing system, Programmable weighing indicator 3600V with USB connection, Camera system, Feed push system on the left and/or right side, Hydraulic operation of restrictor blades, Side shift for cross conveyor belt, Curved cross chain conveyor with side shift, Air-conditioning and 68 kW (92 HP) engine.

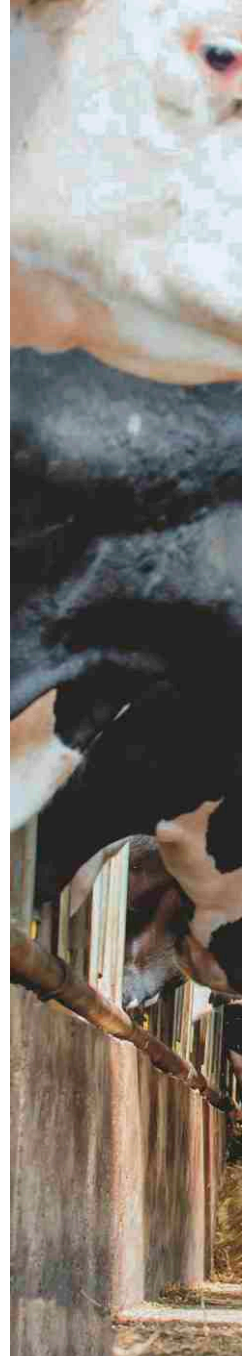

info@trioliet.com

Trioliet BV
Kleibultweg 59
NL-7575 BW Oldenzaal

T +31 541-57 21 21
F +31 541-57 21 25

info@trioliet.com
www.trioliet.com

Trioliet: Invents for you.

 **TRIOLIET**
FEEDING TECHNOLOGY